



To disable carriage return on Elo Tablet MSR:


1. Make sure you are running EC firmware 1.35. If not, then download the firmware update here:
<http://support.elotouch.com/Download/TabletSoftwareUpdate/>
2. Run the SETMSR31 utility and change the mode to “serial” and exit the software.

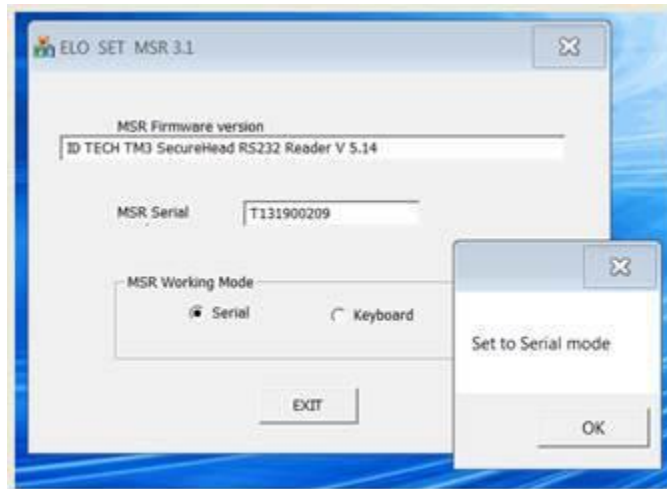

3. Download and install the IDTECH SECUREMAG RS232 Demo Software:
<https://elotouch.sharepoint.com/:u:/s/KnoxvilleTechnicalServices/EXgpdXXIqgJJqDQTbYBlk-0Bt02GdO-oof5mZn1C1wbOgQ?e=IW83Ht>
4. From the “Port” tab in the SECUREMAGE RS232 Demo, choose “Com3” and “Open”

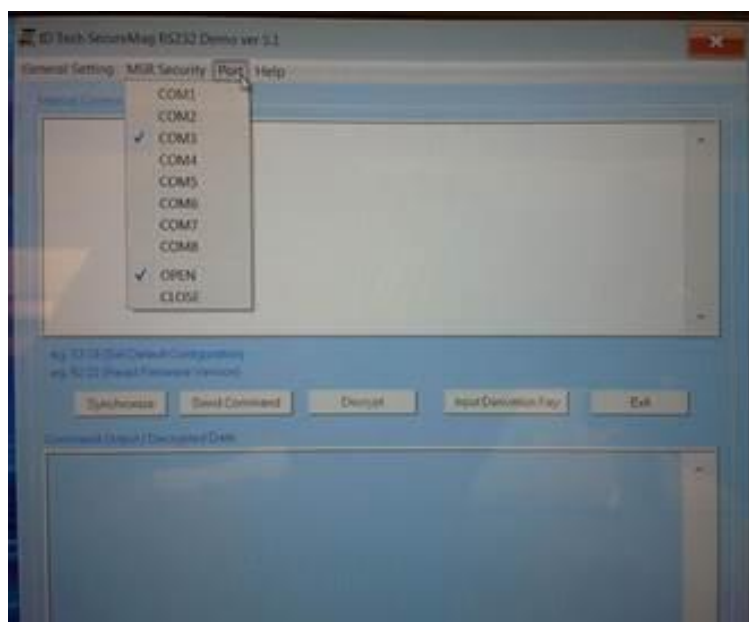

5. Enter **53 17 01 00** in the Command window and then select “Send Command.”

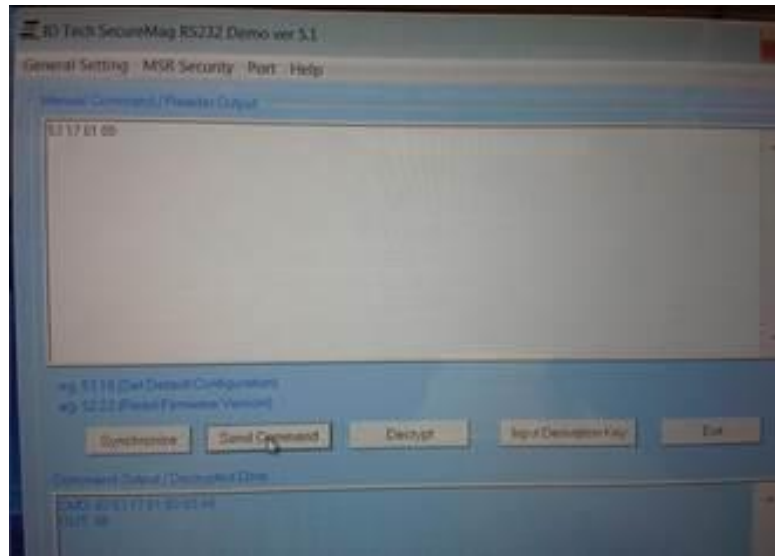

6. Close the SECUREMAG RS232 Demo software and reopen the SETMSR31 utility and change the MSR back to “Keyboard” and then exit the utility.
7. Open Windows Notepad, make sure the cursor is inside the Notepad window, then swipe a Credit Card or any Magnetic Stripe Card. The carriage return should be gone, and all tracks will read on one line, followed by a carriage return.