请访问www.elotouch.com.cn 获取用户手册 请保留备用



## **Quick Installation Guide**

# SO-DIMM, DDR4, MEM KIT

Revision A P/N E593689

### **Elo Touch Solutions Technical Support**

Online self-help: www.elotouch.com/support

#### **North America**

800-ELO-TOUCH Tel +1 408 597 8000 Fax +1 408 597 8050 EloSales.NA@elotouch.com

#### Europe

Tel +32 (0)16 70 45 00 Fax +32 (0)16 70 45 49 elosales@elotouch.com

#### Asia-Pacific

Tel +86 (21) 3329 1385 Fax +86 (21) 3329 1400 EloAsia@elotouch.com

#### **Latin America**

Tel +54 11 4785-9129 EloSales.LATAM@elotouch.com

The information in this document is subject to change without notice. Elo Touch Solutions, Inc. and its Affiliates (collectively "Elo") makes no representations or warranties with respect to the contents herein, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose. Elo reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of Elo to notify any person of such revisions or changes.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, including, but not limited to, electronic, magnetic, optical, chemical, manual, or otherwise without prior written permission of Elo Touch Solutions, Inc.


Elo and the Elo logo are either trademarks or registered trademarks of Elo Touch Solutions, Inc..






## Installation


Please go to www.elotouch.com/support to verify you have the latest drivers before installing this device.

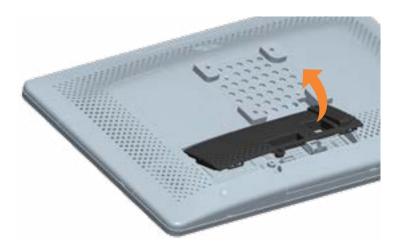


Remove and save screw and connector cover.

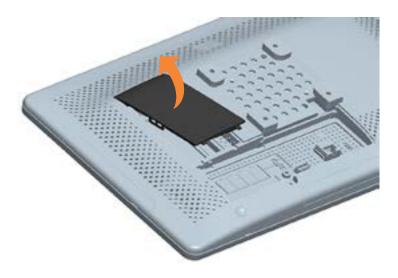

Remove and save DDR cover.



To remove existing memory modules, pull the tabs on each side out and the module will pop up.



Insert the memory module into the rear slot at an angle and then press down to lock it into place. Replace DDR cover and cable cover.



Insert the memory module into the rear slot at an angle and then press down to lock it into place. Replace DDR cover and cable cover.