

BIOS (CMOS) Battery Replacement Procedure


1. Remove the two Philips screws. Using your thumbs, slide the back cover off of the unit.



2. Lift up on cover and remove.



3. Remove the BIOS batter lead from the Motherboard. The BIOS battery is stuck to the back of the audio jack housing with a piece of double sided tape. Firmly grasp the battery and pull it off.

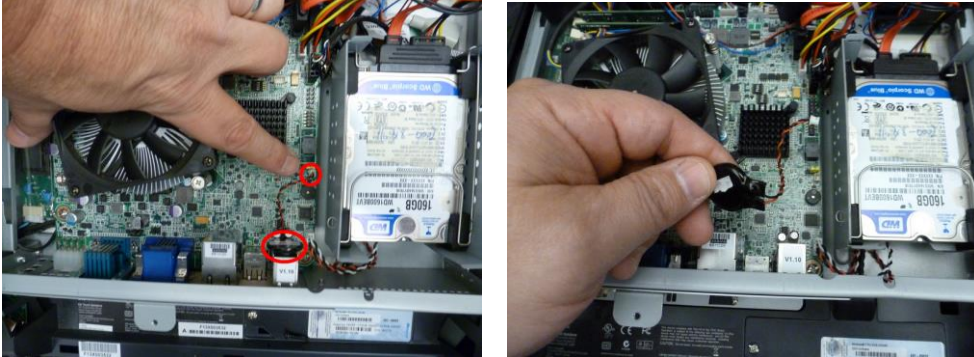

4. The BIOS battery is a CR2032 with leads. This is a very common battery which can be sourced from many places on the web such as this one: <http://tinyurl.com/zvjakq7>



5. After replacing BIOS battery, reassemble unit following above procedure in reverse.