



Step 3:

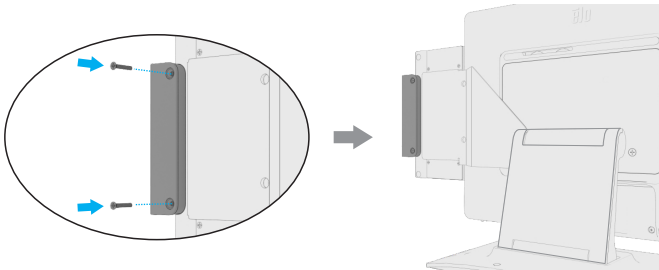

Install the (2) M3x18mm flat head screws from with the kit.

Step 4:

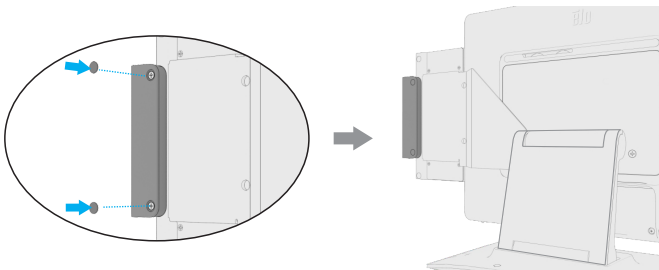

Remove the protective film from the included mylar covers and place the covers over the screws.

Contents:

- 1 x Keypad
- 1 x Cable
- 1 x Bracket for 1523L
- 1 x Bracket for 1723L
- 2 x Clear Key Caps
- 1 x Keycap Puller
- 1 x Flat Head Screw:M4 x 18mm long
- 2 x Pan Head Screws:M3 x 6mm long
- 4 x Flat Head Screws:M3 x 7mm long

Learn more about Elo at EloTouch.com

America

Tel +1 408 597 8000
EloSales.NA@elotouch.com

Europe (EMEA)

Tel +32 16 930 136
EMEA.sales@elotouch.com

Asia-Pacific

Tel +86 (21) 3329 1385
EloAsia@elotouch.com

The information in this document is subject to change without notice. Elo Touch Solutions, Inc. and its Affiliates (collectively "Elo") makes no representations or warranties with respect to the contents herein, and specifically disclaims any implied warranties of merchantability or fitness for a particular purpose. Elo reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of Elo to notify any person of such revisions or changes.

No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, including, but not limited to, electronic, magnetic, optical, chemical, manual, or otherwise without prior written permission of Elo Touch Solutions, Inc.

Elo, the Elo logo, and Elo Edge Connect are trademarks of Elo Touch Solutions, Inc., registered in many jurisdictions worldwide.

©2026 Elo Touch Solutions, Inc. All rights reserved.



E854039



www.elotouch.com



Quick Installation Guide


Elo Edge Connect™ 10-KEY KEYPAD-15-1723L

Revision D
P/N E854039

Go to www.elotouch.com/support to download user manual.


Installing Keypad

Step 1:

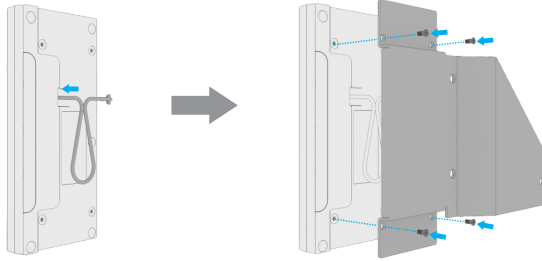


Connect the cable to the keypad. Install the keypad onto the bracket (Select the appropriate bracket compatible with either model 1523L or 1723L). Secure it with the (4) M3 x 7mm flat head screws from the package, as shown.

Step 2:

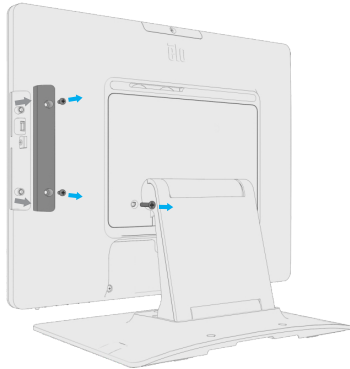


Remove the (2) screws from the peripheral cover and detach the peripheral cover. Then remove the screw from the stand, as shown.

Step 3:

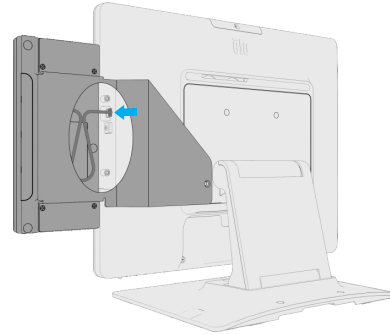

Connect the cable to the monitor.


Step 4:

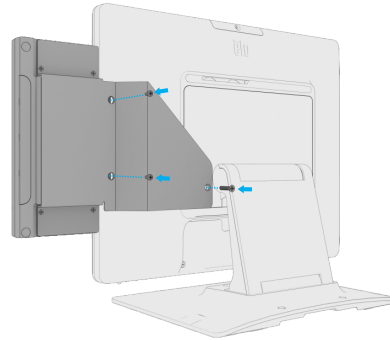

Install the keypad and bracket onto the monitor. Begin by fastening the (2) M3 x 6mm pan head screws provided in the package, followed by the M4 x 18mm flat head screw. Tighten all screws as shown in the illustration.


Installing Optional Elo Edge Connect™ MSR

Step 1:

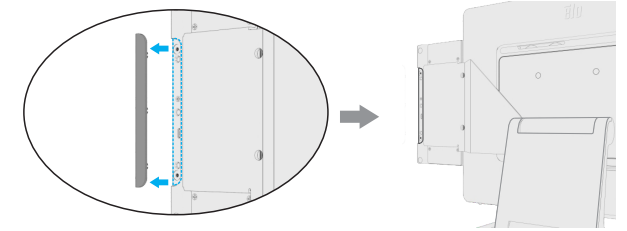

Remove the Edge Cover from the keypad to expose the peripheral bay.

Step 2:

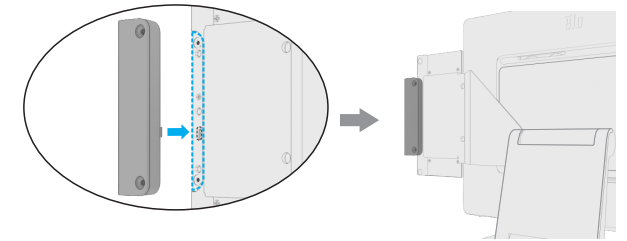

Gently press the MSR into the peripheral bay making sure the connector is mated.